



PULLEY EXTRA HD

Robust high-strength single pulley designed for the most demanding applications.

DESCRIPTION

Durable heavy duty pulley for industrial use and hauling systems, ideal for use in energy sector (installation of electrical power lines).

Designed and optimized for use with a Prusik friction knot or any clamp.

For use with static and dynamic textile ropes up to 16 mm in diameter, suitable for high-strength textile ropes (ropes fully replacing steel wire ropes).

High-quality sintered bronze self-lubricating bearing provide high durability at low speeds and efficiency up to 86 %.



Top attachment point accommodates up to three carabiners.

Unique production number marking, datamatrix.

Side plates provide protection of rope against contact with a surrounding.

Side plate holes enable cleaning of the bearing surroundings.

KEY FEATURES

- high strength pulley
- high quality sintered bronze self lubricating bearing
- top attachment point for up to three carabiners

STANDARDS

CE 1019
EN 12278

FEATURES



2x8 kN



Ø max. 16 mm



435 g / 15.3 oz



unique number




warranty

MATERIALS



- 80 % aluminum alloy
- 10 % stainless steel
- 9 % sintered bronze
- 1 % plastic

TECHNICAL DATA

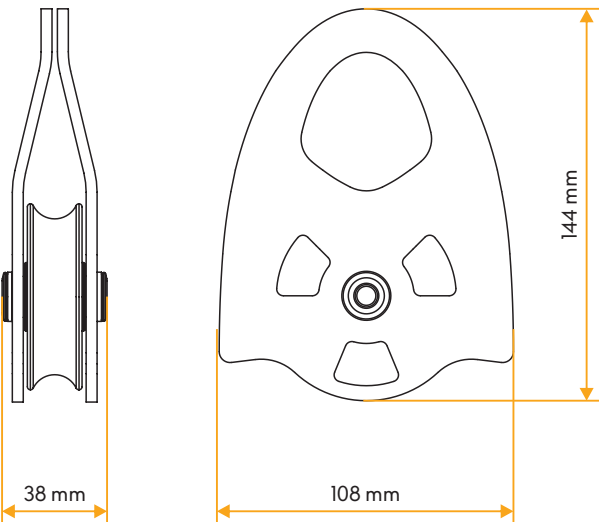

Lifetime of this product is not strictly limited by the manufacturer. Depending on the condition of the product and its history it may be necessary to retire it immediately (e.g. visible signs of damage). Lifetime of this product can be influenced by various factors such as: frequent or improper use; usage environment (humidity, freezing, ice); wear; corrosion; serious stress with relative deformation; exposure to heat sources; improper storage; etc.



beware
of salt



washing



drying



silicon
oil



read
instructions



black version

PULLEY TWIN
RK802



PULLEY EXTRA
RK801



PULLEY EXTRA PLUS
RK808



PULLEY TWIN HD
RK811

STRENGTH	36 kN	32 kN	32 kN	72 kN
MAX. DIAMETER OF ROPE	13 mm	13 mm	13 mm	16 mm
WEIGHT	421 g / 14.9 oz	257 g / 9.1 oz	276 g / 9.7 oz	740 g / 26.1 oz